



TRANSIZIONE
5.0



Nexa TOPCon N-type

FRONT SIDE

430-450W

› Double Glass Bifacial

+23%

Module efficiency

Module efficiency up to 23.04 %

+25.1%

Cell efficiency

Cell efficiency up to 25.16%



Different designs

Black - Silver



Bifacial cell

Bifaciality factor: 80 ± 5 %




PFAS free

Product free from perfluoroalkyl and polyfluoroalkyl substances



Sustainable product

High percentage of recyclable materials

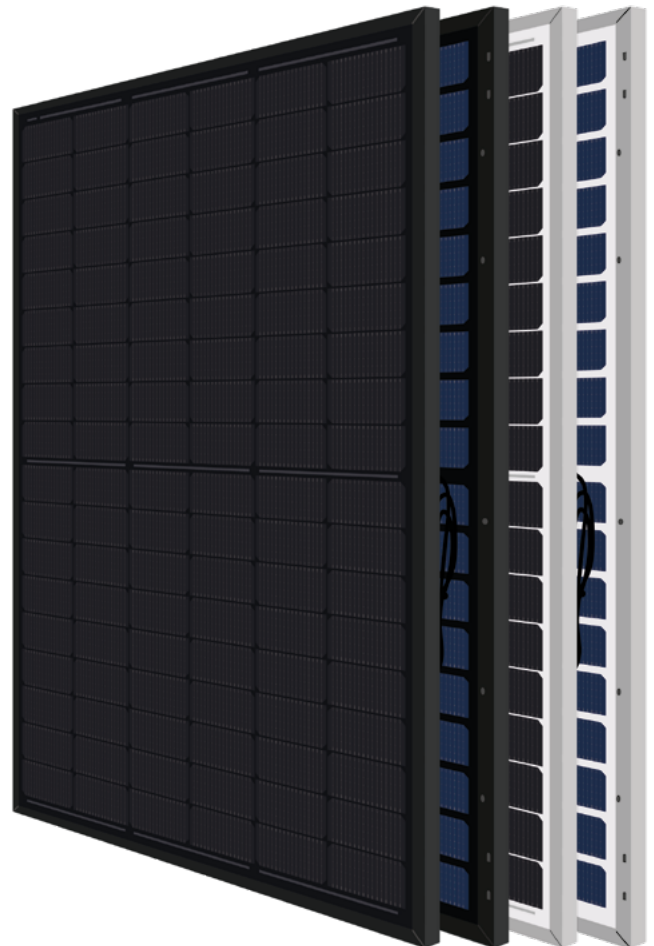

30

Years

Product Warranty

30

Years

Performance Warranty

Linear Warranty

1% First year degradation

0.38% Annual degradation

88% Power in year 30

Light up your world with Eurener

Eurener's extensive portfolio of certifications and awards is testament to our unwavering commitment to our partners and our deep sense of social and ethical responsibility.



Spanish Quality
Worldwide





Awarded as TOP Brand PV
in -FR-SW-BE-UK-



Ecovadis
Platinum Medal



ESM430-54HM10 – ESM440-54HM10 & ESM450-54HM10 — NEXA Double Glass Bifacial

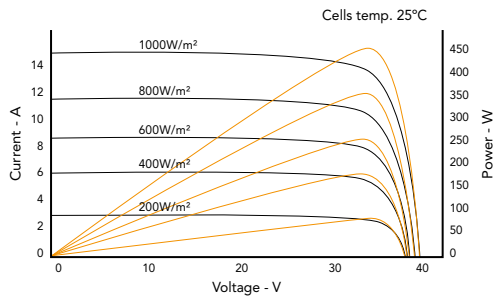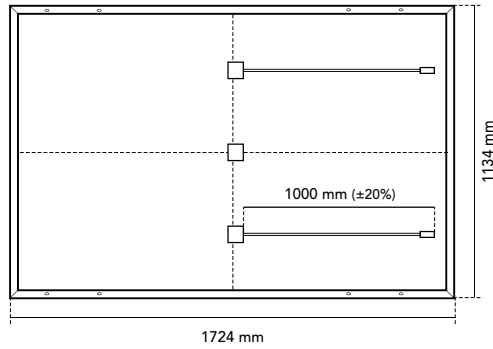

Mechanical Specification

Solar cells	54 x 2 M10, N-Type bifacial monocrystalline silicon cells
Front Glass	2mm anti-reflective surface tempered solar glass
Back Glass	2mm tempered solar glass
Frame	Black/silver anodized aluminium
Junction Box	IP68, 3 by-pass diodes
Connector	Original MC4-Evo 2
Cable	1000 mm (±20%) length and 4 mm ² section
Dimension	1724 x 1134 x 30 mm (±1%)
Area	1.96 m ²
Weight	24 kg
Packaging	962 pcs/truck

Temperature Coefficients

Temperature coefficient of Isc (α)	0.045 %/°C
Temperature coefficient of Voc (β)	-0.275 %/°C
Temperature coefficient of Pmax (γ)	-0.29 %/°C
Temperature range	-40 °C ~ +85 °C
Nominal operating cell temperature (NOCT)	45 ± 2 °C

Electrical Characteristics	MEPV 430		MEPV 440		MEPV 450	
	STC	NOCT	STC	NOCT	STC	NOCT
Nominal power. Pmax	430 Wp	329 Wp	440 Wp	337 Wp	450 Wp	345 Wp
Short-circuit current (Isc)	14.26 A	11.47 A	14.37 A	11.61 A	14.52 A	11.75 A
Open-circuit voltage (Voc)	38.42 V	36.88 V	38.91 V	37.24 V	39.33 V	37.61 V
Maximum power current (Imp)	13.52 A	10.88 A	13.63 A	11.01 A	13.76 A	11.14 A
Maximum power voltage (Vmp)	31.82 V	30.27 V	32.30 V	30.63 V	32.71 V	30.99 V
Module efficiency	22.02 %		22.53 %		23.04 %	
Cell efficiency	24.04 %		24.60 %		25.16 %	
Electrical Characteristics	Bifacial gain 10%					
Nominal power. Pmax	473 Wp		484 Wp		495 Wp	
Short-circuit current (Isc)	15.63 A		15.81 A		15.97 A	
Open-circuit voltage (Voc)	38.49 V		38.91 V		39.33 V	
Maximum power current (Imp)	14.82 A		14.99 A		15.13 A	
Maximum power voltage (Vmp)	31.91 V		32.30 V		32.71 V	

* STC: 1000 W/m², module temperature 25°C, AM 1.5

* NOCT: 800 W/m², ambient temperature 20°C, AM 1.5

Operating parameters

Maximum voltage	1500 V
Maximum series fuse rating. Ir	25 A
Power output tolerance	0 - +3%
Voc and Isc tolerance	±3%
Fire reaction - CSI	Class 1 (UNI 9177)
Protection class	Class II (IEC 61140)
Mechanical loads	Front load 5400 Pa, Back load 2400 Pa

Corporate and product certificates

ECOVADIS rating - Platinum medal (TOP 1%)
Solar Industry Forced Labor Prevention Pledge by SEIA
ISO9001:2015 - Quality Management Systems
ISO14001:2015 - Environmental Management System
WEEE compliance in Germany
PV CYCLE Italy
IEC 61215 - Terrestrial photovoltaic (PV) modules - Design qualification and type approval
IEC 61730 - Photovoltaic (PV) module safety qualification
IEC 61701 - Photovoltaic (PV) modules - Salt mist corrosion testing
IEC 62716 - Photovoltaic (PV) modules - Ammonia corrosion testing
IEC TS 62804 - Photovoltaic (PV) modules - Test methods for the detection of potential-induced degradation
Hail resistance HW3/RG3
Certificate of Factory Production Control (UK) - MCS
Assesed by Sundahus



NOTE: Read the safety and installation manual before using the product. This data sheet is not legally binding, Eurener reserves the right of final interpretation. Eurener reserves the right to change the product characteristics and/or specifications without prior notice. The latest versions of all documents can always be found on our website at www.eurener.com.

SINCE 1997
more than energy

Headquarter
eurener.com
contact@eurenerworld.com
+34 960 045 515
Calle Colón, 1-23
46004, Valencia, Spain

Factory
Polígono Industrial Bierzo Alto
(A6 - Km 372)
Calle Las Canteras Par IE1
24318 Bembibre,
León, Spain

Italy
eurener.it
dg@eurener.it
+39 035 335196
Via Tre Venezia, 31C
24044 Dalmine, BG, Italy