


## Agro PERC

FRONT SIDE

# 260 - 275 W

› Double Glass Bifacial

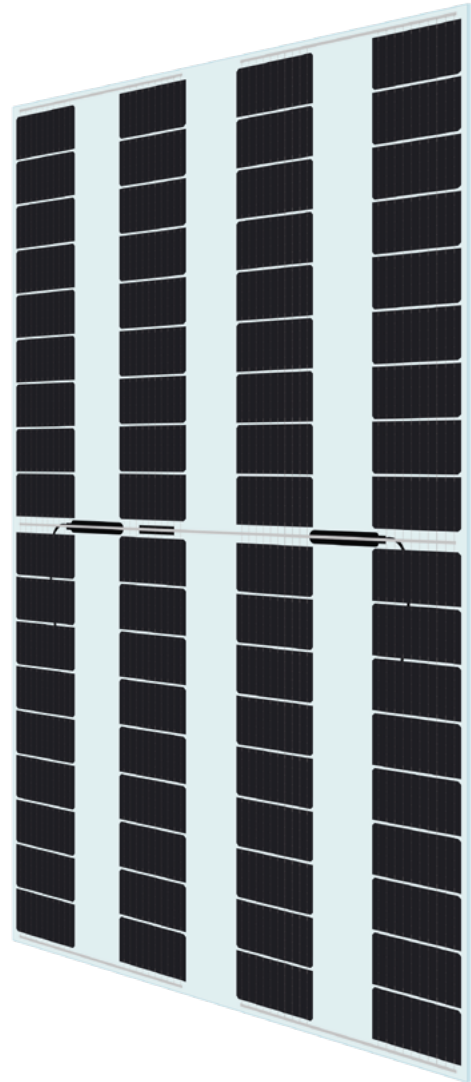

### Module efficiency

Module efficiency up to 14.20 %



### 45% Transmittance

High percentage of light can pass through it



### Versatility

For greenhouses, carports or other roofs



### Bifacial cell

Extra energy generated from the backside of the cell depending on albedo



### Sustainable product

High percentage of recyclable materials



### Hail resistance

RG3/HW3 certified

# 25

Years

Product Warranty

+5 years for Premium Partners

# 30

Years

Performance Warranty

Linear Warranty

**2%** First year degradation

**0.55%** Annual degradation

**82.05%** Power in year 30

### Light up your world with Eurener

Eurener's extensive portfolio of certifications and awards is testament to our unwavering commitment to our partners and our deep sense of social and ethical responsibility.



Spanish Quality  
Worldwide





Awarded as TOP Brand PV  
in -FR-SW-BE-UK-



Ecovadis  
Platinum Medal



# Eurener MEPV — AGRO Double Glass Bifacial 260-275W

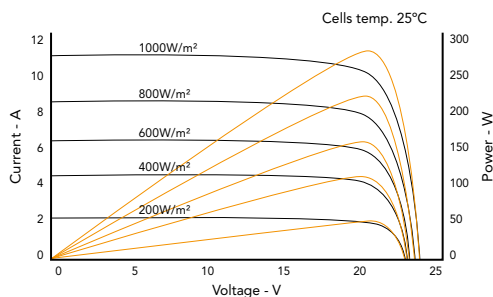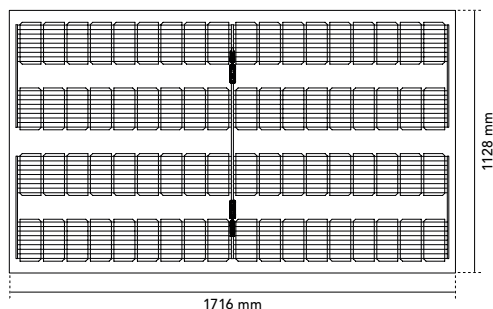

Mechanical Specification	
Solar cells	Bifacial monocrystalline silicon cells
Front Glass	2mm anti-reflective surface tempered solar glass
Back Glass	2mm tempered solar glass
Frame	Frameless
Junction Box	IP68, 3 by-pass diodes
Connector	Connector MC4 compatible
Cable	1000 mm (±20%) length and 4 mm <sup>2</sup> section
Dimension	1716 x 1128 mm (±1%)
Area	1.94 m <sup>2</sup>
Weight	25.5 kg

Temperature Coefficients	
Temperature coefficient of Isc (α)	0.04 %/°C
Temperature coefficient of Voc (β)	-0.28 %/°C
Temperature coefficient of Pmax (γ)	-0.35 %/°C
Temperature range	-40 °C ~ +85 °C
Nominal operating cell temperature (NOCT)	43 ± 2 °C

Electrical Characteristics	MEPV 260		MEPV 265		MEPV 270		MEPV 275	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Nominal power. Pmax	260 Wp	194 Wp	265 Wp	198 Wp	270 Wp	201 Wp	275 Wp	205 Wp
Short-circuit current (Isc)	13.54 A	10.92 A	13.64 A	11.02 A	13.75 A	11.09 A	13.84 A	11.18 A
Open-circuit voltage (Voc)	24.21 V	22.90 V	24.39 V	23.12 V	24.69 V	23.26 V	24.96 V	23.53 V
Maximum power current (Imp)	12.95 A	10.27 A	13.06 A	10.39 A	13.15 A	10.43 A	13.19 A	10.50 A
Maximum power voltage (Vmp)	20.11 V	18.90 V	20.32 V	19.03 V	20.55 V	19.29 V	20.86 V	19.50 V
Module efficiency	13.45 %		13.71 %		13.96 %		14.20 %	

Electrical Characteristics	Bifacial gain 10%							
	Nominal power. Pmax	286 Wp		292 Wp		297 Wp		302 Wp
Short-circuit current (Isc)	14.90 A		15.00 A		15.12 A		15.22 A	
Open-circuit voltage (Voc)	24.21 V		24.39 V		24.69 V		24.96 V	
Maximum power current (Imp)	14.22 A		14.35 A		14.45 A		14.50 A	
Maximum power voltage (Vmp)	20.11 V		20.32 V		20.55 V		20.86 V	

\* STC: 1000 W/m<sup>2</sup>, module temperature 25°C, AM 1.5  
 \* NOCT: 800 W/m<sup>2</sup>, ambient temperature 20°C, AM 1.5

Operating parameters	
Maximum voltage	1500 V
Maximum series fuse rating. Ir	30 A
Power output tolerance	0 - +3%
Voc and Isc tolerance	±3%
Fire rating	Class C (UL 790)
Protection class	Class II (IEC 61140)
Mechanical loads	Front load 5400 Pa, Back load 2400 Pa

Corporate and product certificates
ECOVADIS rating - Platinum medal (TOP 1%)
Solar Industry Forced Labor Prevention Pledge by SEIA
ISO9001:2015 - Quality Management Systems
ISO14001:2015 - Environmental Management System
WEEE compliance in Germany
PV CYCLE Italy
IEC 61215 - Terrestrial photovoltaic (PV) modules - Design qualification and type approval
IEC 61730 - Photovoltaic (PV) module safety qualification
IEC 61701 - Photovoltaic (PV) modules - Salt mist corrosion testing
IEC 62716 - Photovoltaic (PV) modules - Ammonia corrosion testing
IEC TS 62804 - Photovoltaic (PV) modules - Test methods for the detection of potential-induced degradation
Hail resistance HW3/RG3
Certificate of Factory Production Control (UK) - MCS
Fire reaction class: 1 - LAPI



NOTE: Read the safety and installation manual before using the product. This data sheet is not legally binding, Eurener reserves the right of final interpretation. Eurener reserves the right to change the product characteristics and/or specifications without prior notice. The latest versions of all documents can always be found on our website at [www.eurener.com](http://www.eurener.com).

**SINCE 1997**  
 more than energy

**eurener.com**  
 contact@eurenerworld.com  
 +34 960 045 515  
 Calle Colón, 1-23  
 46004, Valencia. Spain

## European Experts in Residential modules

Since 1997 our main purpose has been to supply quality and long-lasting photovoltaic modules that allow us and future generations, to continue generating clean energy to take care of our planet.