

## Icon Plus PERC

# > 550W

+20.3%

### Module efficiency

Module efficiency up to 21.30 %



### PID resistance

Certified according to IEC TS 62804 standards



### Increased resistance

Certified resistance against salt mist and ammonia



### Hail resistance

RG3/HW3 certified



### Increased PV surface

Higher power output for commercial and ground projects



### Optimized BOS

Lower structure, materials and wiring costs



**20** Years

**Product Warranty**

+5 years for Premium Partners

**30** Years

**Performance Warranty**

Linear Warranty

**2%** First year degradation

**0.62%** Annual degradation

**80%** Power in year 30

### Light up your world with Eurener

Eurener's extensive portfolio of certifications and awards is testament to our unwavering commitment to our partners and our deep sense of social and ethical responsibility.



Spanish Quality  
Worldwide





Awarded as TOP Brand PV  
in -FR-SW-BE-UK-



Ecovadis  
Platinum Medal



# Eurener MEPV — ICON Plus 550W

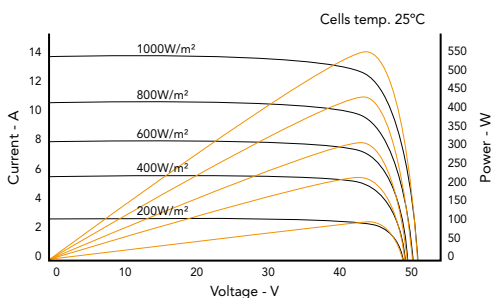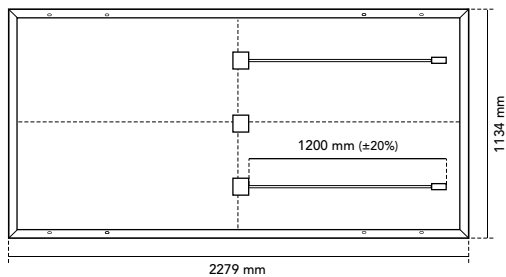

Mechanical Specification	
Solar cells	Monocrystalline silicon cells
Front Glass	3.2 mm thick tempered glass with high strength and ARC
Frame	Silver anodized aluminium
Junction Box	IP68, 3 by-pass diodes
Connector	Connector MC4 compatible
Cable	1200 mm (±20%) length and 4 mm² section
Dimension and packaging	2279 x 1134 x 30 mm (±1%) > 720 pcs/truck 2279 x 1134 x 35 mm (±1%) > 620 pcs/truck
Area	2.58 m²
Weight	28 kg

Temperature Coefficients	
Temperature coefficient of Isc (α)	0.045 %/°C
Temperature coefficient of Voc (β)	-0.275 %/°C
Temperature coefficient of Pmax (γ)	-0.35 %/°C
Temperature range	-40 °C ~ +85 °C
Nominal operating cell temperature (NOCT)	43 ± 2 °C

Electrical Characteristics		MEPV 550
		STC
Nominal power. Pmax		550 Wp
Short-circuit current (Isc)		13.96 A
Open-circuit voltage (Voc)		49.85 V
Maximum power current (Imp)		13.19 A
Maximum power voltage (Vmp)		41.72 V
Module efficiency		21.30 %
		NOCT
Nominal power. Pmax		416 Wp
Short-circuit current (Isc)		11.16 A
Open-circuit voltage (Voc)		47.12 V
Maximum power current (Imp)		10.59 A
Maximum power voltage (Vmp)		39.28 V

\* STC: 1000 W/m², module temperature 25°C, AM 1.5  
 \* NOCT: 800 W/m², ambient temperature 20°C, AM 1.5

Operating parameters	
Maximum voltage	1500 V
Maximum series fuse rating. Ir	25 A
Power output tolerance	0 - +3%
Voc and Isc tolerance	±3%
Fire rating	Class C (UL 790)
Protection class	Class II (IEC 61140)
Mechanical loads	Front load 5400 Pa, Back load 2400 Pa

Corporate and product certificates	
ECOVADIS rating - Platinum medal (TOP 1%)	
Solar Industry Forced Labor Prevention Pledge by SEIA	
ISO9001:2015 - Quality Management Systems	
ISO14001:2015 - Environmental Management System	
WEEE compliance in Germany	
PV CYCLE Italy	
IEC 61215 - Terrestrial photovoltaic (PV) modules - Design qualification and type approval	
IEC 61730 - Photovoltaic (PV) module safety qualification	
IEC 61701 - Photovoltaic (PV) modules - Salt mist corrosion testing	
IEC 62716 - Photovoltaic (PV) modules - Ammonia corrosion testing	
IEC TS 62804 - Photovoltaic (PV) modules - Test methods for the detection of potential-induced degradation	
Hail resistance HW3/RG3	
Certificate of Factory Production Control (UK) - MCS	
Fire reaction class: 1 - LAPI	



NOTE: Read the safety and installation manual before using the product. This data sheet is not legally binding, Eurener reserves the right of final interpretation. Eurener reserves the right to change the product characteristics and/or specifications without prior notice. The latest versions of all documents can always be found on our website at [www.eurener.com](http://www.eurener.com).

**SINCE**  
**1997**  
 more than  
 energy

**eurener.com**  
 contact@eurenerworld.com  
 +34 960 045 515  
 Calle Colón, 1-23  
 46004, Valencia. Spain

## European Experts in Residential modules

Since 1997 our main purpose has been to supply quality and long-lasting photovoltaic modules that allow us and future generations, to continue generating clean energy to take care of our planet.