

Coloured TOPCon N-type

> 350 - 360W

+18.4%

Module efficiency
Module efficiency up to 18.44 %



Colour selection
Wide range of colours for perfect BIPV projects



PID resistance
Certified according to IEC TS 62804 standards




Increased resistance
Certified resistance against salt mist and ammonia



Hail resistance
RG3/HW3 certified



Easy to handle
Comfortable installation thanks to an optimized area size

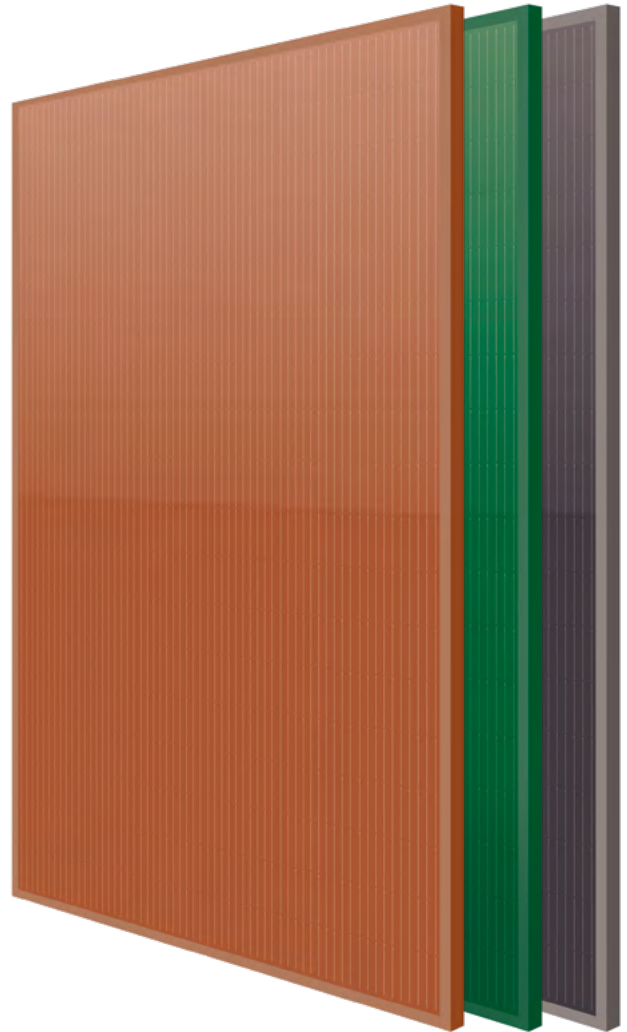

20 Years

Product Warranty
+5 years for Premium Partners

30 Years

Performance Warranty
Linear Warranty

2% First year degradation

0.55% Annual degradation

82.05% Power in year 30



Light up your world with Eurener

Eurener's extensive portfolio of certifications and awards is testament to our unwavering commitment to our partners and our deep sense of social and ethical responsibility.





Eurener MEPV — COLOURED 350-360W

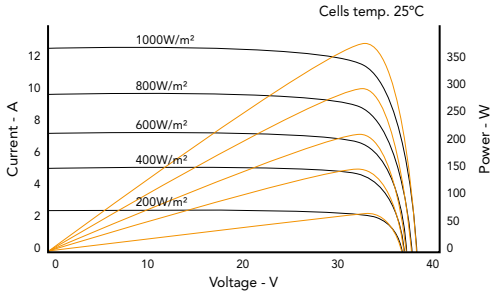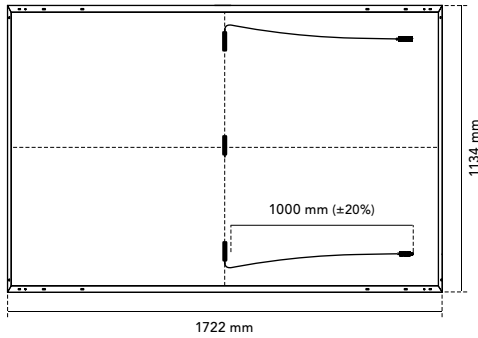

Mechanical Specification	
Solar cells	N-Type monocrystalline silicon cells
Front Glass	3.2 mm thick tempered glass with high strength and ARC
Frame	Terracotta/Emerald/Anthracite anodized aluminium
Junction Box	IP68, 3 by-pass diodes
Connector	Connector MC4 compatible
Cable	1000 mm (±20%) length and 4 mm ² section
Dimension	1722 x 1134 x 30 mm (±1%)
Area	1.95 m ²
Weight	20.5 kg
Packaging	936 pcs/truck

Temperature Coefficients	
Temperature coefficient of Isc (α)	0.05 %/°C
Temperature coefficient of Voc (β)	-0.28 %/°C
Temperature coefficient of Pmax (γ)	-0.29 %/°C
Temperature range	-40 °C ~ +85 °C
Nominal operating cell temperature (NOCT)	45 ± 2 °C

TERRACOTTA

EMERALD

ANTHRACITE

MEPV 350

MEPV 360

MEPV 350

MEPV 360

MEPV 350

MEPV 360

Electrical Characteristics	STC					
	MEPV 350	MEPV 360	MEPV 350	MEPV 360	MEPV 350	MEPV 360
Nominal power. Pmax	350 Wp	360 Wp	350 Wp	360 Wp	350 Wp	360 Wp
Short-circuit current (Isc)	11.92 A	12.24 A	11.93 A	12.25 A	11.92 A	12.23 A
Open-circuit voltage (Voc)	36.91 V	37.15 V	36.93 V	37.17 V	36.89 V	37.14 V
Maximum power current (Imp)	11.44 A	11.69 A	11.44 A	11.70 A	11.43 A	11.68 A
Maximum power voltage (Vmp)	30.65 V	30.85 V	30.66 V	30.86 V	30.65 V	30.86 V
Module efficiency	17.92 %	18.44 %	17.92 %	18.44 %	17.92 %	18.44 %

Electrical Characteristics	NOCT					
	MEPV 350	MEPV 360	MEPV 350	MEPV 360	MEPV 350	MEPV 360
Nominal power. Pmax	265 Wp	270 Wp	265 Wp	270 Wp	265 Wp	270 Wp
Short-circuit current (Isc)	9.38 A	9.54 A	9.38 A	9.55 A	9.36 A	9.53 A
Open-circuit voltage (Voc)	34.90 V	35.17 V	34.93 V	35.20 V	34.89 V	35.15 V
Maximum power current (Imp)	9.23 A	9.36 A	9.24 A	9.36 A	9.22 A	9.35 A
Maximum power voltage (Vmp)	28.73 V	28.87 V	28.69 V	28.91 V	28.75 V	28.89 V

* STC: 1000 W/m², module temperature 25°C, AM 1.5 * NOCT: 800 W/m², ambient temperature 20°C, AM 1.5

Operating parameters	
Maximum voltage	1000 - 1500 V
Maximum series fuse rating. Ir	25 A
Power output tolerance	0 - +3%
Voc and Isc tolerance	±3%
Fire rating	Class C (UL 790)
Protection class	Class II (IEC 61140)
Mechanical loads	Front load 5400 Pa, Back load 2400 Pa

Corporate and product certificates	
ECOVADIS rating - Platinum medal (TOP 1%)	
Solar Industry Forced Labor Prevention Pledge by SEIA	
ISO9001:2015 - Quality Management Systems	
ISO14001:2015 - Environmental Management System	
WEEE compliance in Germany	
PV CYCLE Italy	
IEC 61215 - Terrestrial photovoltaic (PV) modules - Design qualification and type approval	
IEC 61730 - Photovoltaic (PV) module safety qualification	
IEC 61701 - Photovoltaic (PV) modules - Salt mist corrosion testing	
IEC 62716 - Photovoltaic (PV) modules - Ammonia corrosion testing	
IEC TS 62804 - Photovoltaic (PV) modules - Test methods for the detection of potential-induced degradation	
Hail resistance HW3/RG3	
Certificate of Factory Production Control (UK) - MCS	
Fire reaction class: 1 - LAPI	



NOTE: Read the safety and installation manual before using the product. This data sheet is not legally binding, Eurener reserves the right of final interpretation. Eurener reserves the right to change the product characteristics and/or specifications without prior notice. The latest versions of all documents can always be found on our website at www.eurener.com.

SINCE
1997
more than
energy

eurener.com
contact@eurenerworld.com
+34 960 045 515
Calle Colón, 1-23
46004, Valencia. Spain

European Experts in Residential modules

Since 1997 our main purpose has been to supply quality and long-lasting photovoltaic modules that allow us and future generations, to continue generating clean energy to take care of our planet.